
3000 W / 0–150 V / 0–25 A Laser driver / programmable supply

Select against the laser load, current/voltage window, input supply, controls and protection requirements.

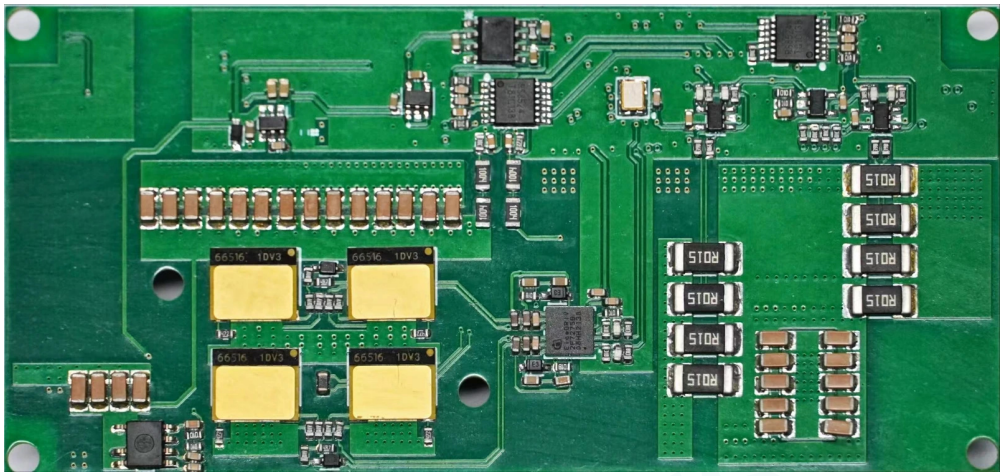

Photograph of the reference assembly

Parameters


Input voltage	40V-250V
Output voltage options	0-150V
Output current	0-25A
Communication	CANBus

Applications & selection

Semiconductor laser drive and voltage/current-controlled test platforms.

Voltage, current and power limits must be checked against the operating area; they are not assumed simultaneous.

Dimensions & mounting

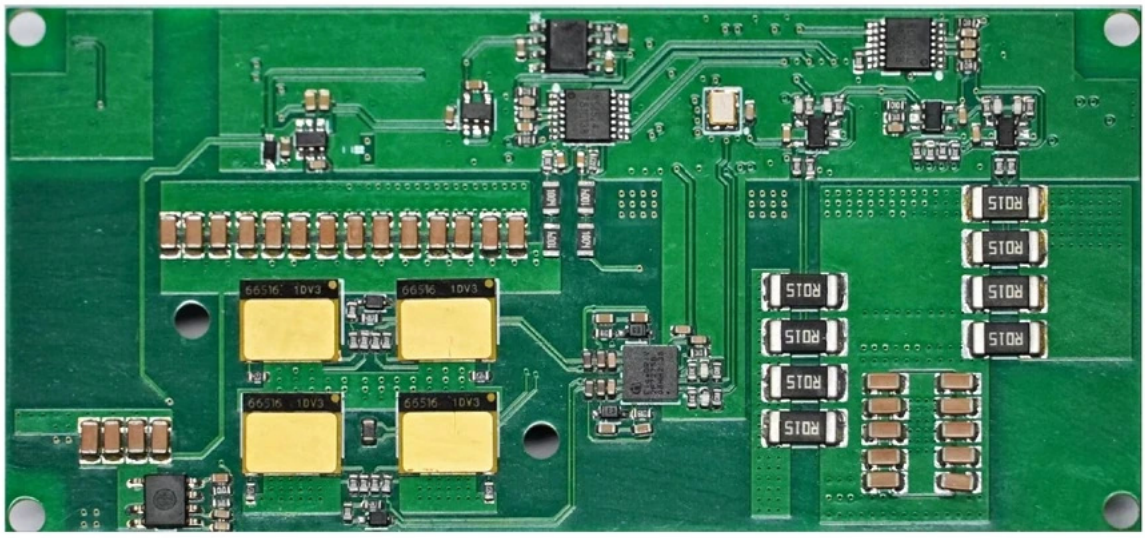

Photograph of the reference assembly

Reference values support selection. Confirm final configuration and acceptance conditions in the technical agreement. A power class is not guaranteed output under every operating condition.